

**FAST
EASY
EFFECTIVE**

PREBENA®

www.prebena.com



SlideSystem
FOR **TIMBER FRAME SYSTEM**



Covering of wooden frame systems

PREBENA

www.prebena.com

Slider 4C-Z50


for staples type Z from 16 - 50 mm (5/8" - 2")



Applicable in both directions



Easy distance adjustment

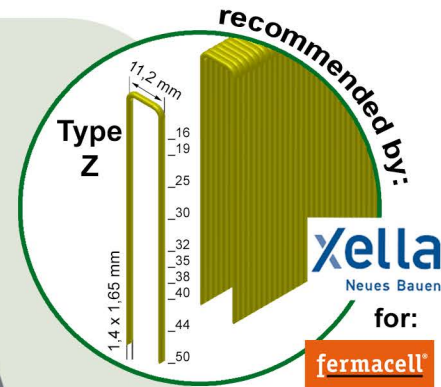

EUROCODE 5
CE EN 14592



Double-sided operable

No electrical connection necessary
Pneumatic / mechanical regulation
Shooting of the staples in accurate, constant distances
Angle of staple entry 30° according to Eurocode 5

Technical specification:

Weight: 9 kg (19.84 lb.)
Operation pressure: 5 - 8 bar (71 - 114 psi.)
Air requirement: 1,7 l / staple (0.449 gal. / staple)
LxWxH: 455 x 335 x 455 mm (17.9 x 13.19 x 17.91 in.)

Application areas:

Plasterboards, gypsum fiberboards,
wooden composite boards (e.g. OSB)

Also available with
pneumatic stapler 4C-L50.

- Single shot everytime
- double-sided possible
- Lock-out safety device
- Applicable in both directions
- Roll-controlled automatic fire
- Distance adjustment for 40, 60, 80, 110 mm (1.57, 2.36, 3.15, 4.33 in.)
- Guide-sight slot
- Adjustable lateral stop
- Safety device - Operation only when device on material
- Double-sided operable
- Adjustable depth control
- Rubberized wheels
- Adjustable exhaust
- Quick release

PREBENA Wilfried Bornemann GmbH & Co. KG

Seestraße 20-26 • D-63679 Schotten

Phone: 0049 6044/9601-0 • Fax: 0049 6044/9601-820 • info@prebena.com